


## D05 High Flow Parallel Circuit with Flange Ports

(See Page 1.99.01 for Relief Cartridges)

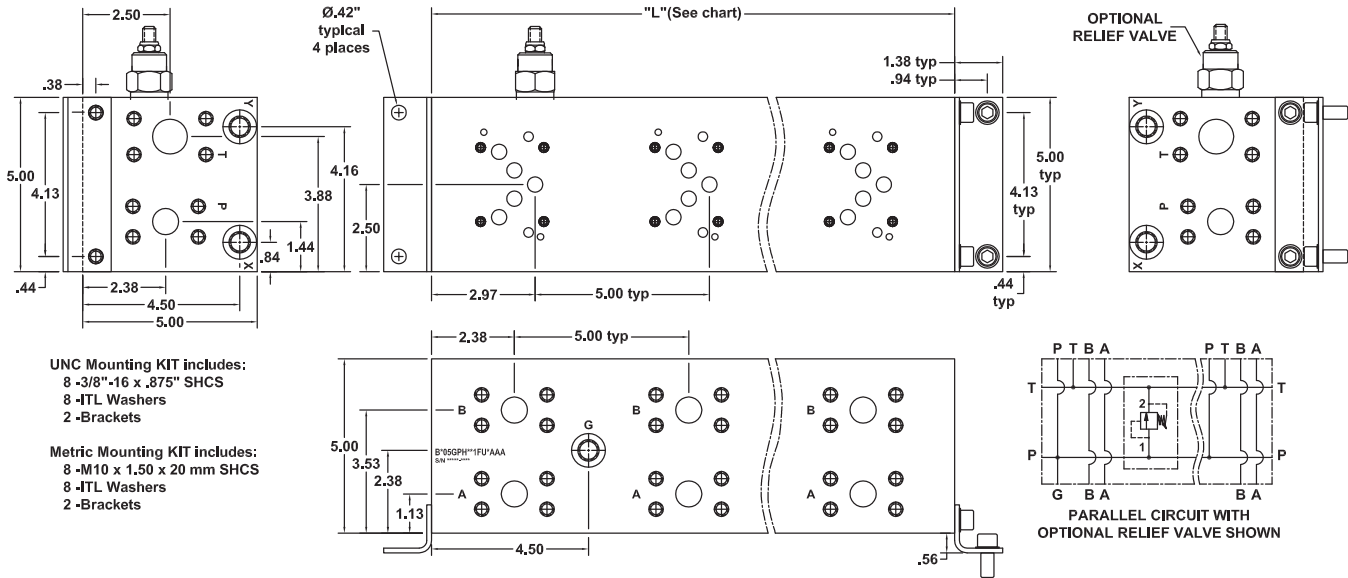

UNC Mounting KIT includes:  
8 -3/8"-16 x .875" SHCS  
8 -JTL Washers  
2 -Brackets

Metric Mounting KIT includes:  
8 -M10 x 1.50 x 20 mm SHCS  
8 -JTL Washers  
2 -Brackets

No. of Stations	1	1*	2	3	4	5	6	7	8
Dim. "L", 5.00" spacing	5.00	6.00	10.00	15.00	20.00	25.00	30.00	35.00	40.00
est. weight in lb.- alum	12	14	23	35	46	57	68	80	91
est. weight in lb.- iron	31	37	62	92	122	153	183	213	244


\* DIMENSIONS FOR 1 STATION WITH RELIEF CAVITY

### NOTES:

- "05G" Valve Pattern has Single Tank Gallery and No Pilot Ports
- "05T" Valve Pattern has Dual Tank Galleries and No Pilot Ports
- "05H" Valve Pattern has Dual Tank Galleries and Pilot Ports as Shown
- "05E" Valve Pattern has Dual Tank Galleries and Pilot Ports Opposite to what is Shown

### PART NUMBER SYSTEM

Aluminum D05H with 5.00" Spacing, Common Y & Flange porting example: BA05HPI\*\*1FUABAA

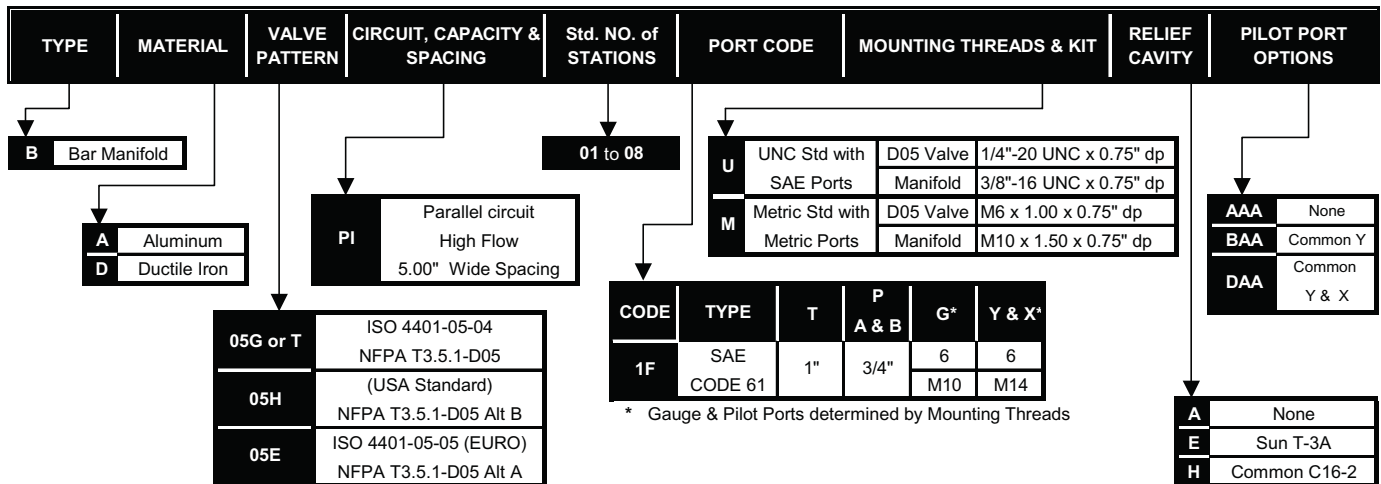

WE RESERVE THE RIGHT TO DISCONTINUE MODELS, OR CHANGE SPECIFICATIONS WITHOUT NOTICE OR INCURRING OBLIGATION

Lynch Products Can Be Modified to Suit Your Application

Phone: 1 (888) 626-4365 or +1 (905) 363-2400 Fax: 1 (800) 263-5807 www.lynch.ca sales@lynch.ca