


## D07 High Flow Parallel Circuit with Flange Ports

(See Page 1.99.01 for Relief Cartridges)

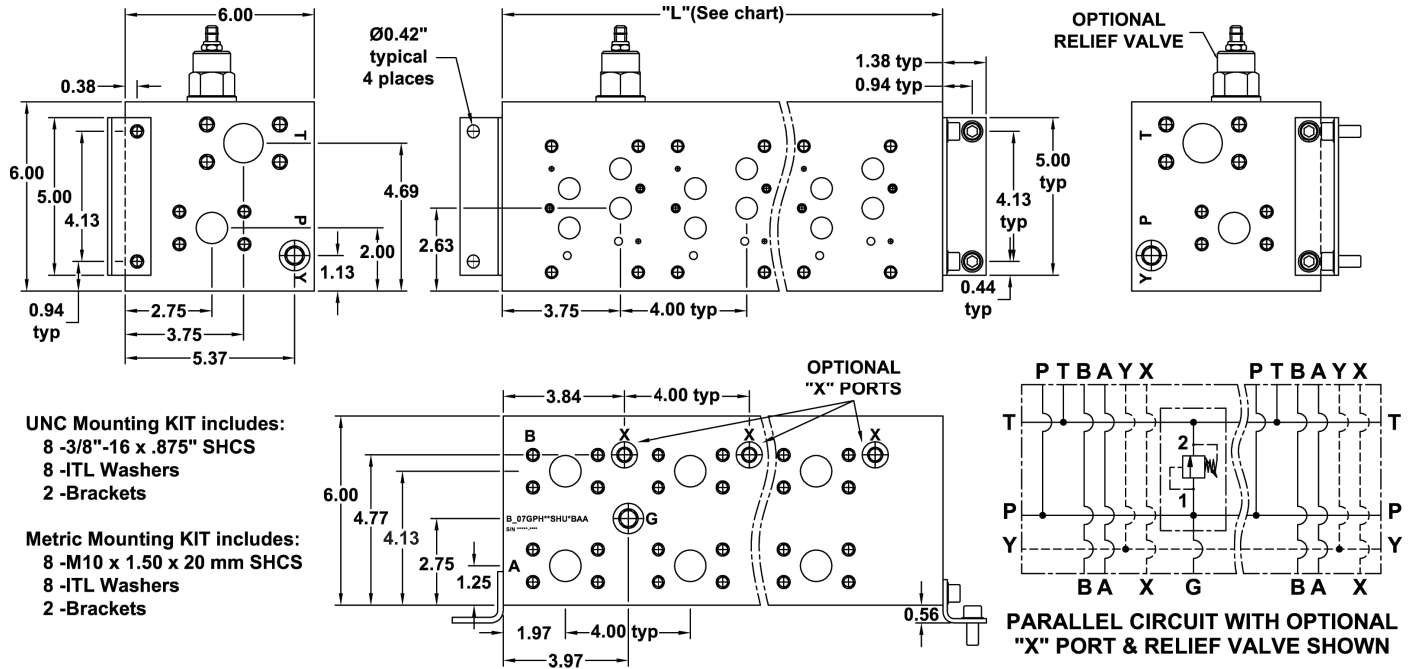


| No. of Stations           | 1    | 2     | 3     | 4     | 5     | 6     | 7     | 8     | 9     |
|---------------------------|------|-------|-------|-------|-------|-------|-------|-------|-------|
| Dim. "L", 4.00" spacing   | 6.00 | 10.00 | 14.00 | 18.00 | 22.00 | 26.00 | 30.00 | 34.00 | 38.00 |
| est. weight in lb. - alum | 20   | 33    | 46    | 59    | 72    | 85    | 98    | 111   | 1239  |
| est. weight in lb. - iron | 53   | 103   | 123   | 158   | 193   | 355   | 263   | 298   | 333   |

### Notes:

- 1) Isolations on P & T available - See Page 5 for Codes
- 2) Common X port option available - contact factory
- 3) Wide Spacing Option - contact factory

## PART NUMBER SYSTEM

Aluminum D07 with Common Y & Flange porting example: **BA07GPH\*\*1HUABAA**

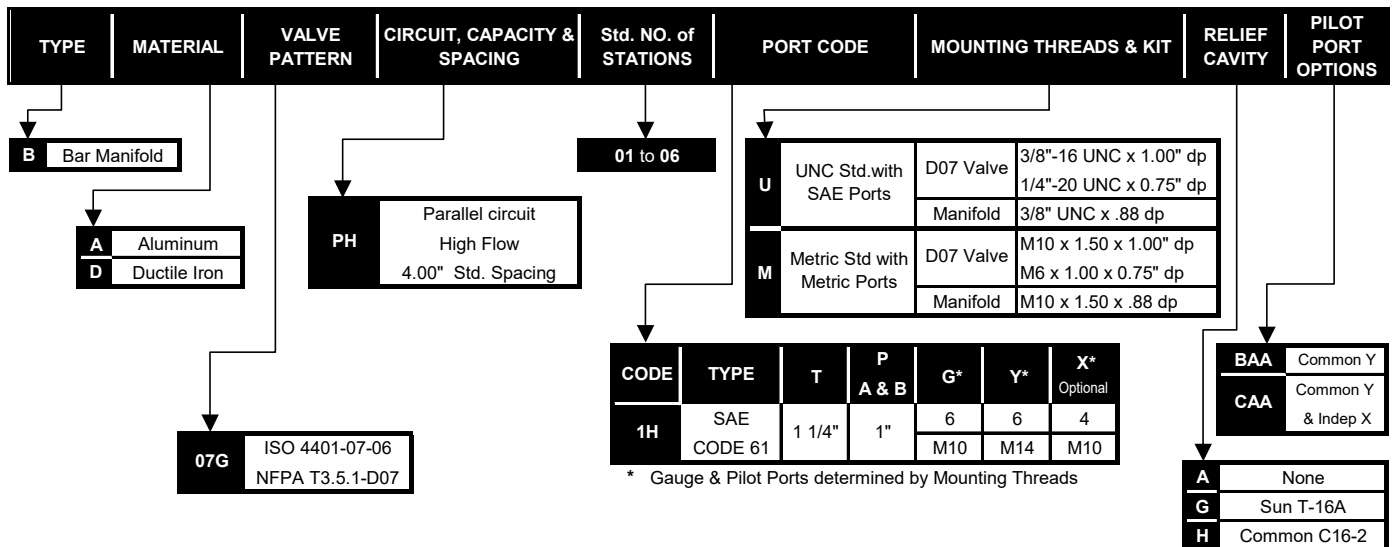

WE RESERVE THE RIGHT TO DISCONTINUE MODELS, OR CHANGE SPECIFICATIONS WITHOUT NOTICE OR INCURRING OBLIGATION

**Lynch Products Can Be Modified to Suit Your Application**

Phone: 1 (888) 626-4365 or +1 (905) 363-2400 Fax: 1 (800) 263-5807 www.lynch.ca sales@lynch.ca