D05 Subplate - Nominal 1/2”

SPXX_05GSPSDUAA

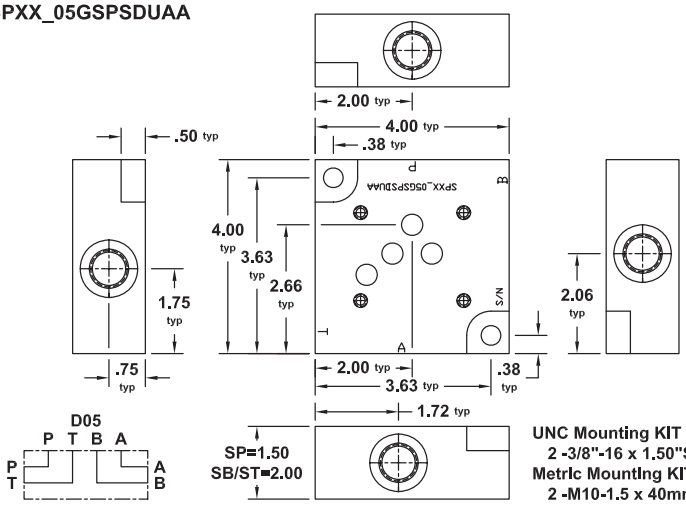

UNC Mounting KIT includes:
2 -3/8"-16 x 1.50"SHCS
Metric Mounting KIT Includes:
2 -M10-1.5 x 40mm SHCS

BOTTOM VIEW
SPXX_05GSBSDUAA

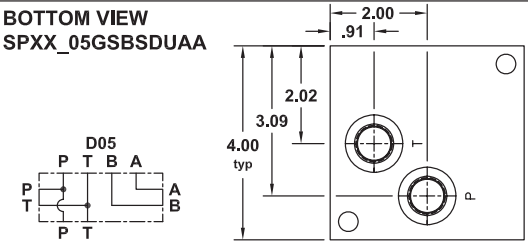

UNC Mounting KIT Includes:
2 -3/8"-16 x 2.00"SHCS
2 -Plugs
Metric Mounting KIT Includes:
2 -M10-1.5 x 50mm SHCS
2 -Plugs

BOTTOM VIEW
SPXX_05GSTSDUAA

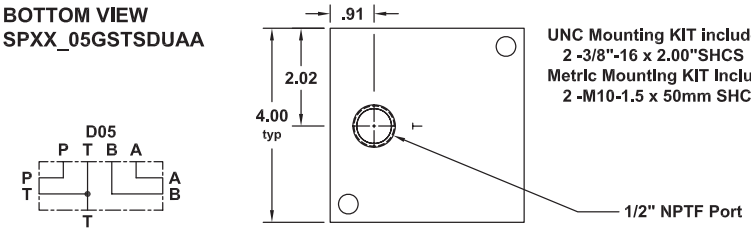

UNC Mounting KIT includes:
2 -3/8"-16 x 2.00"SHCS
Metric Mounting KIT Includes:
2 -M10-1.5 x 50mm SHCS

SPXX_05GBPSDUAA

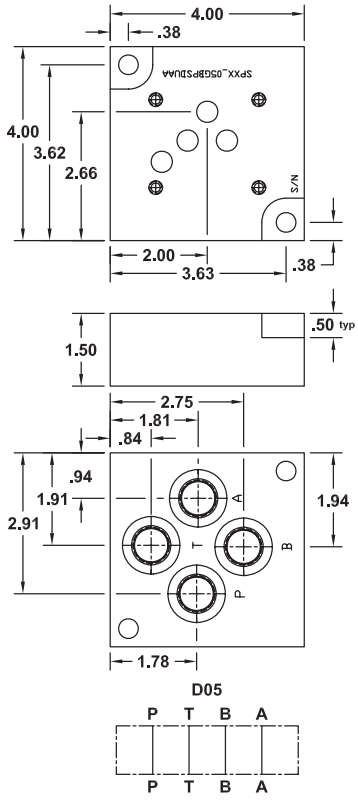

UNC Mounting KIT Includes:
2 -3/8"-16 x 1.50"SHCS
Metric Mounting KIT includes:
2 -M10-1.5 x 40mm SHCS

PART NUMBER SYSTEM

Aluminum D05 Side Ported Subplate with SAE 8 Ports Example: **SPXXA05GSPSDUAA**

TYPE	MATERIAL	VALVE PATTERN	PORTING STYLE	PORT CODE	MOUNTING THREADS & KIT	PILOT PORT OPTIONS

TYPE

SPXX	Subplate

MATERIAL

A	Aluminum
D	Ductile Iron

VALVE PATTERN

05G	ISO 4401-05-04 NFPA T3.5.1-D05

PORTING STYLE

BP	Bottom Ported Only
SB	Side Ported with Bottom P & T Ports
SP	Side Ported only
ST	Side Ported with 1/2" NPTF "T" Port on Bottom only

PORT CODE

CODE	TYPE	P, T, A and B
SD	SAE	8
ND	NPTF	1/2"
BD	BSPP	1/2"
TD	BSPT	1/2"
MD	METRIC	M18

MOUNTING THREADS & KIT

U	UNC Std for SAE & NPT	D05 Valve	1/4"-20 UNC x .75 dp
		Subplate	3/8"-16 SHCS
M	Metric Std for BSP* & Metric	D05 Valve	M6 x 1.00 x .75 dp
		Subplate	M10 x 1.50 SHCS

PILOT PORT OPTIONS

AA	None

WE RESERVE THE RIGHT TO DISCONTINUE MODELS, OR CHANGE SPECIFICATIONS WITHOUT NOTICE OR INCURRING OBLIGATION